

Broadband Low Noise RF Amplifier (LNA)



Dual \pm RF output, 50kHz-20GHz, 35 dB gain

DATASHEET

[Return to the Webpage](#)



Features

- Frequency: 50kHz-20GHz
- Signal Gain: 30dB
- NF = 3dB
- $V_{out} = 4.48V_{pp}$

Applications

- 5G Communication
- Test Equipment
- Optical Modulator Driver
- Radar System



Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind Agiltron only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with the use of a product or its application.

Rev 05/05/26

This LNA broadband low-noise RF amplifier delivers up to 17 dBm output power with 35 dB gain across a frequency range of 50 kHz to 18 GHz. It features a typical noise figure (NF) of 3 dB over the 0.1–20 GHz range. The amplifier provides dual \pm RF outputs to drive a dual Mach–Zehnder (MZ) modulator, enabling up to 40 GHz modulation bandwidth. The unit operates from a +12 V DC supply at 120 mA and is equipped with GPPO connectors as standard, with SMA female connectors available as an option.

Specifications

Parameter	Min	Typical	Max	Unit
Frequency Range	0.00005	18	20	GHz
Gain		30	35	dB
NF (0.1-20GHz)		3	5	dB
Input Power		-10	0	dBm
P1dB		+17		dBm
Psat		+16		dBm
Output Vpp		4.48		Vpp
Drain Supply	+8	+12	+15	V
Current		80		mA
Input Return Loss		-10		dB
Output Return Loss		-10		dB
Spec Temp		25		°C
RF Input Power		+20		dBm
Input Vpp		3.56		Vpp
Operating Temperature(note)	-20		60	°C
Storage Temperature	-40		85	°C
Input Port		GPPO Male	2.92mm Female	
Output Port		GPPO Male	2.92mm Female	
Weight (Without Heatsink)		50		g

Note: -40 to +85°C is available according to request.

Caution

Please pay attention to the case temperature. If case temperature exceed higher than +50°C, heat sink and fan are required, or the amplifier may be damaged.

Broadband Low Noise RF Amplifier (LNA)




Dual \pm RF output, 50kHz-20GHz, 35 dB gain


DATASHEET

Test Data (25°C)

S21 50MHz-20GHz

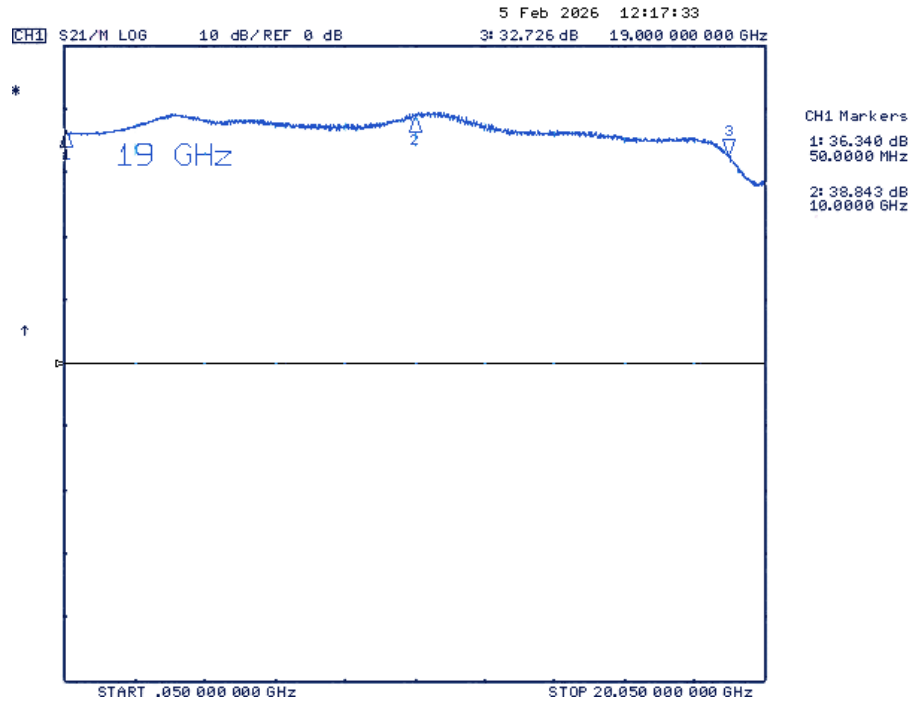

Psat vs Frequency

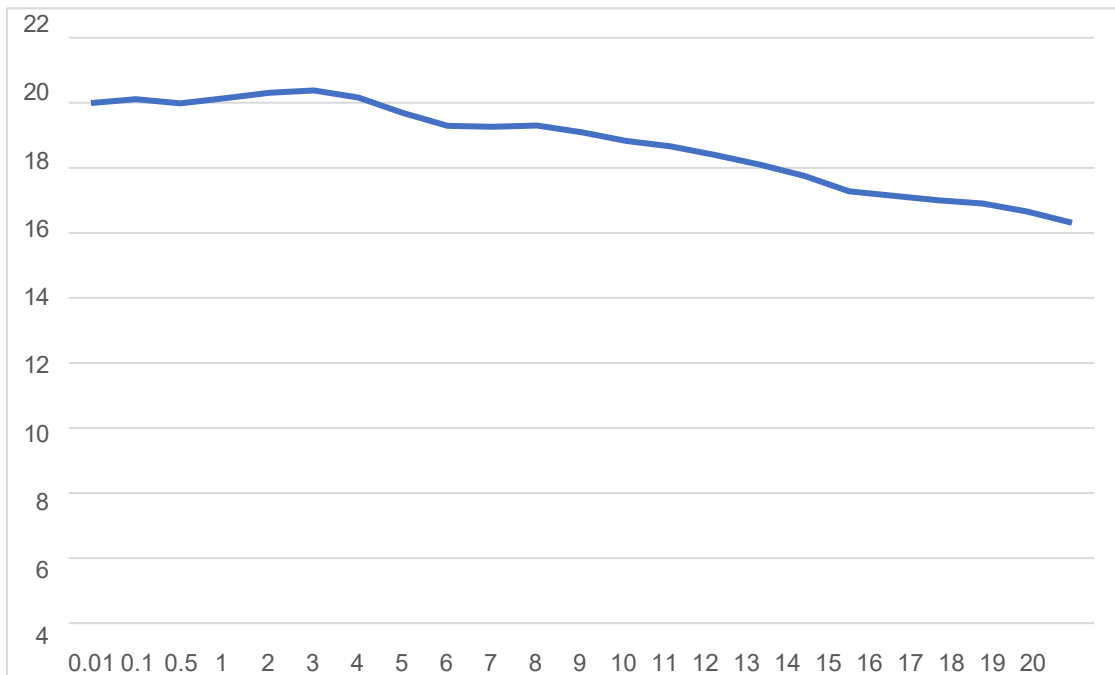


Broadband Low Noise RF Amplifier (LNA)



Dual \pm RF output, 50kHz-20GHz, 35 dB gain

DATASHEET

Dimensions (mm)

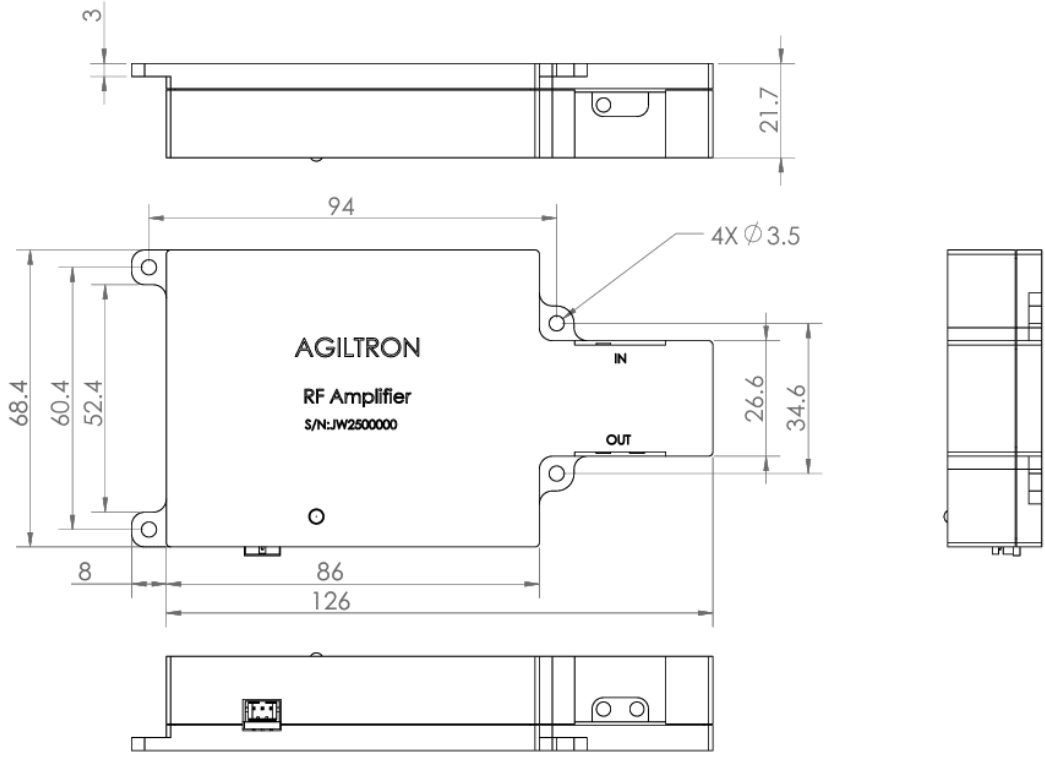

Ordering Information (Part Number)

Prefix	0005	20	30	3	17	<input type="checkbox"/>
Prefix	Low Frequency	High Frequency	Gain	NF	P1dB	Module ^[1]
LNAM-	0.05MHz = 0005	20GHz = 20	30dB = 30	3dB = 3	17dBm = 17	No = 0 Yes = 1

[1]. The module is a small metal box integrated with a power supply inside.