

Multimode Fiber Optical Patch Cable 0.6mm Core

400nm to 2400nm



We offer multimode patch cables with high-purity silica step-index fibers with a doped light confining cladding layer having a core diameter of 25, 50, 105, 200, 400, 600, and 800 μm , respectively. All our fiber has a doped glass cladding layer that makes the connectors more reliable and lower loss than the plastic coating-based large core fibers. We use high-quality ceramic ferrule connectors specially made to match the fiber diameters on both ends. FC/PC is standard, and other types of connectors with all possible configuration variations are available on special orders. These cables feature $\varnothing 3$ mm protective jackets. Each patch cable includes two protective caps that shield the ferrule ends from dust contaminants. Moreover, we produce high optical power handling up to 100W optic patch cables with these fibers by fusion the fiber end with a collimating lens (see link). We also uniquely produce ultra-low loss $< 0.01\text{dB}$ multimode fiber optic patch cables (see link).

Features

- In Stock Standard Version
- High Polish with $>50\text{dB}$ RL
- Ceramic Radiused Ferrules
- 3mm Protective Jacket
- Custom Cable Available

Applications

- Test
- Instrument/System

Specifications ^[1]

Parameter	Min	Typical	Max	Unit
Wavelength	400		2400	nm
Insertion Loss ^[1]		0.4	0.5	dB
Core Diameter	590	600	610	μm
Cladding Diameter	650	660	670	μm
Numerical Aperture		0.22		
Return Loss	32			dB
Fiber Type	Pure silica 600/660			
Jacket	3mm tube			

[1] Measured at the center wavelength using a laser with $\text{CPR} < 14$. The customer can specify the test wavelength and the type of light source used.

Order Information / Part Number

FCMM-	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Measured Wavelength*	Length	Key	Power	Jacket	Fiber	Connector1	Connector2
	480nm=4 590nm=5 650nm=6 850nm=8 980nm=9 1550nm=A 1600nm=B 2000nm=2	1m=A1 2m=A5 12m=12 Special=00	Regular =1 Special=0	Regular=1 2W= 2 5W =5 Special = 0	3mm =1 0.9mm=2 Special=0	600/660=6	FC/PC = 1 Special=0	FC/PC = 1 Special=0


Fiber Cable Single Mode **Red Color indicates special order**

*Customer must specify the light source to be used for the test.

Multimode Fiber Optical Patch Cable 0.6mm Core

400nm to 2400nm

Connector End Face Image

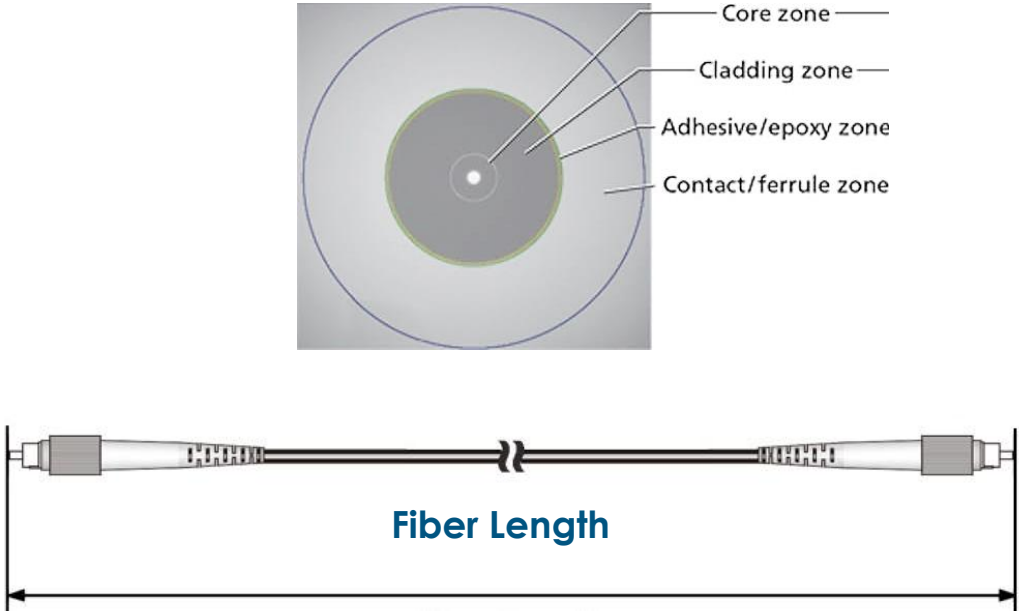

Schematic of High Power Handling Fiber Connector Configuration

We produce high optical power handling connectors by first expanding the beam size and then collimating the beam all inside the fiber without free space elements and optical coating.

